

SYMBOLS

- Work area
- Cone, drum or barricade
- Sign on portable or permanent support
- Arrow board
- Barricade or drum with flashing light
- Type III barricade with flashing lights
- Flagger with traffic control sign.

GENERAL NOTES

- * Cones at 8 m (25') centers for 75 m (250'). Additional cones may be placed at 15 m (50') centers. When drums or Type I or Type II barricades are used, the interval between devices may be doubled.
- ** Use flagger sign only when flagger is present.
- *** For approved sideroad closures.

SIGN SPACING	
Posted Speed	Sign Spacing
55	164 m (500')
50-45	115 m (350')
<45	60 m (200')

- ① = Refer to SIGN SPACING TABLE for distances.
- ② = Required for speeds > 40 MPH


Where, at anytime, day or night, any vehicle, equipment, workers or their activities encroach on the pavement during shoulder operations or where construction requires lane closures in urban areas.

Where L is:

SPEED LIMIT	FORMULAS	
70 km/h (40 mph) or less:	Metric $L = \frac{WS^2}{150}$	(English) $L = \frac{WS^2}{60}$
80 km/h (45 mph) or greater:	$L = 0.65(W)(S)$ $L = (W)(S)$	

W = Width of offset in meters (feet).
S = Normal posted speed km/h (mph).

All dimensions are in millimeters (inches) unless otherwise shown.

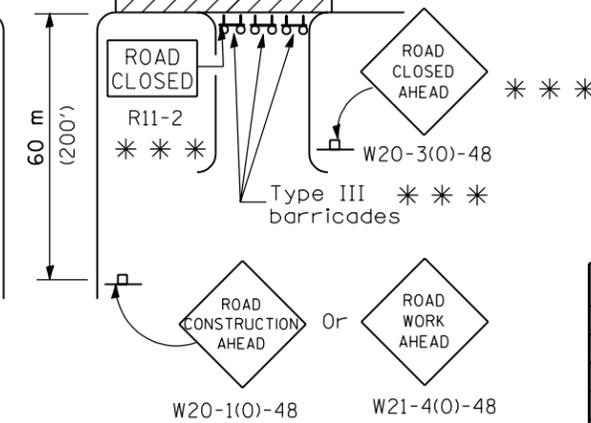

Illinois Department of Transportation

APPROVED January 1, 2000
ENGINEER OF OPERATIONS

APPROVED January 1, 2000
ENGINEER OF DESIGN AND ENVIRONMENT

ISSUED 1-1-97

DATE	REVISIONS
1-1-00	Rev. arrow board for single lane work.
	Rev. GENERAL NOTES.
1-1-99	Rev. barr. symbols, sign spacing & added flagger.

**URBAN LANE CLOSURE
MULTILANE 1W OR 2W WITH
NONTRAVERSABLE MEDIAN**

STANDARD 701601-03